


Plan

14943000410 Shower curtain PLAN Flame CS

PRODUCT



DRAWING

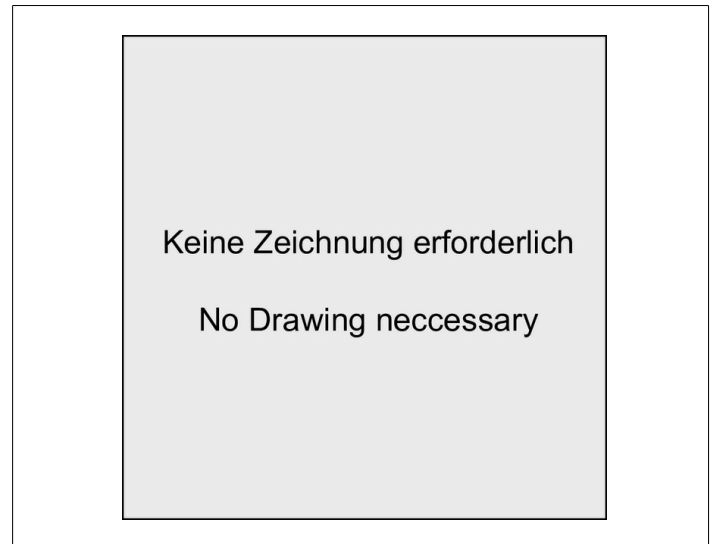

PRODUCT ATTRIBUTES

highgrade flame resistance DIN 4102/B1
100% trevira, 80g/m², vertical seams
reinforced for stainless steel eyelets
Distance between eyelets appr. 200 mm
Weighted seam 50 g per meter
impregnated, fungicide, antibacterial, antistatic,
washable at 30°, shrinkage appr. 1-2%
tested acc. to OEKO-Tex Standard 100
complete with white curtain rings

SURFACE

off-white/8 eyelets

DIMENSION

1800 x 1400 mm

NOTE

SPECIFICATIONS

KEUCO PLAN Shower curtain PLAN Flame CS 14943000410
1400 x 1800 mm off-white/ 8 eyelets
highgrade flame resistance DIN 4102/B1
100 % trevira, 80 g/m²
vertical seams, reinforced for stainless steel eyelets
Distance between eyelets appr. 20 cm
stainless steel rolled hem sewn on the right, per meter 50 g
impregnated, fungicide, antibacterial, antistatic,
calendered, washable at 30°, shrinkage appr. 1-2%
tested acc. to OEKO-Tex Standard 100
complete with white curtain rings

Information concerning the measurements:

All dimensions refer to actual finished size.

In order for the shower curtain not to touch bottom of bath tub or the floor we recommend the following: Distance between floor and bottom edge of curtain appr. 30 mm. Distance between centre of curtain pole and top edge of curtain appr. 40 mm.

Please allow appr. 1.3 to 1.5 times curtain pole length when calculating required width of curtain.