


Plan

14943000420 Shower curtain PLAN Flame CS

PRODUCT



DRAWING

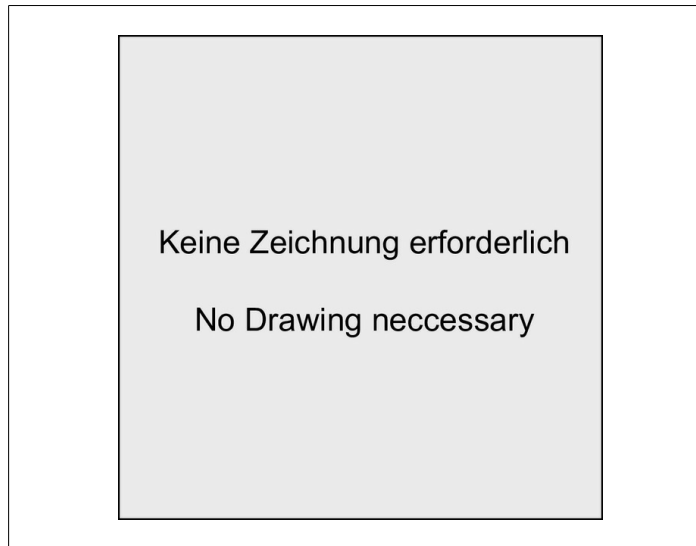

PRODUCT ATTRIBUTES

highgrade flame resistance DIN 4102/B1
100% trevira, 80g/m², vertical seams
reinforced for stainless steel eyelets
Distance between eyelets appr. 200 mm
Weighted seam 50 g per meter
impregnated, fungicide, antibacterial, antistatic,
washable at 30°, shrinkage appr. 1-2%
tested acc. to OEKO-Tex Standard 100
complete with white curtain rings

SURFACE

off-white/11 eyelets

DIMENSION

1800 x 2000 mm

NOTE

SPECIFICATIONS

KEUCO PLAN Shower curtain PLAN Flame CS 14943000420
2000 x 1800 mm off-white/ 8 eyelets
highgrade flame resistance nach DIN 4102/B1
100 % trevira, 80 g/m²
vertical seams, reinforced for stainless steel eyelets
Distance between eyelets appr. 20 cm
stainless steel rolled hem sewn on the right, per meter 50 g
impregnated, fungicide, antibacterial, antistatic,
calendered, washable at 30°, shrinkage appr. 1-2%
tested acc. to OEKO-Tex Standard 100
complete with white curtain rings

Information concerning the measurements:
All dimensions refer to actual finished size.
In order for the shower curtain not to touch bottom of bath
tub or the floor we recommend the following: Distance
between floor and bottom edge of curtain appr. 30 mm.
Distance between centre of curtain pole and top edge of
curtain appr. 40 mm.

Please allow appr. 1.3 to 1.5 times curtain pole length when
calculating required width of curtain.