




**Plan**

**14943000430 Shower curtain PLAN Flame CS**

**PRODUCT**



**DRAWING**

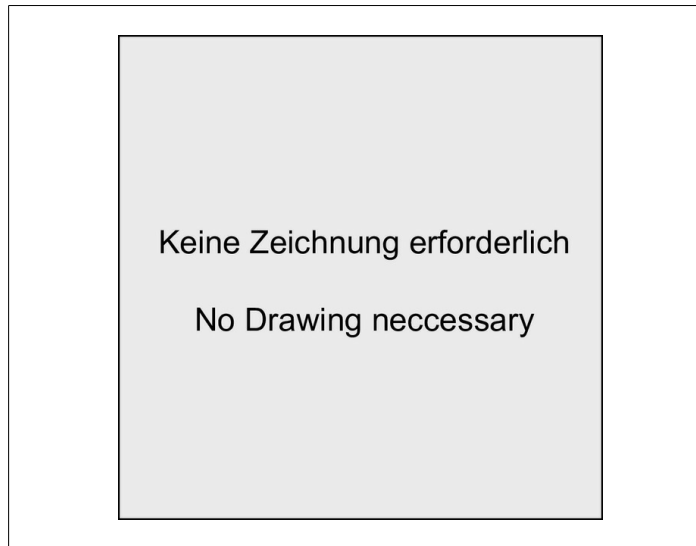

**PRODUCT ATTRIBUTES**

highgrade flame resistance DIN 4102/B1  
100% trevira, 80g/m<sup>2</sup>, vertical seams  
reinforced for stainless steel eyelets  
Distance between eyelets appr. 200 mm  
Weighted seam 50 g per meter  
impregnated, fungicide, antibacterial, antistatic,  
washable at 30°, shrinkage appr. 1-2%  
tested acc. to OEKO-Tex Standard 100  
complete with white curtain rings

**SURFACE**

off-white/16 eyelets

**DIMENSION**

1800 x 3000 mm

**NOTE**

**SPECIFICATIONS**

KEUCO PLAN Shower curtain PLAN Flame CS 14943000430  
3000 x 1800 mm off-white/ 8 eyelets  
highgrade flame resistance nach DIN 4102/B1  
100 % trevira, 80 g/m<sup>2</sup>  
vertical seams, reinforced for stainless steel eyelets  
Distance between eyelets appr. 20 cm  
stainless steel rolled hem sewn on the right, per meter 50 g  
impregnated, fungicide, antibacterial, antistatic,  
calendered, washable at 30°, shrinkage appr. 1-2%  
tested acc. to OEKO-Tex Standard 100  
complete with white curtain rings

Information concerning the measurements:

All dimensions refer to actual finished size.

In order for the shower curtain not to touch bottom of bath tub or the floor we recommend the following: Distance between floor and bottom edge of curtain appr. 30 mm. Distance between centre of curtain pole and top edge of curtain appr. 40 mm.

Please allow appr. 1.3 to 1.5 times curtain pole length when calculating required width of curtain.