




**Plan**

**14943000620 Shower curtain PLAN uni**

**PRODUCT**



**DRAWING**

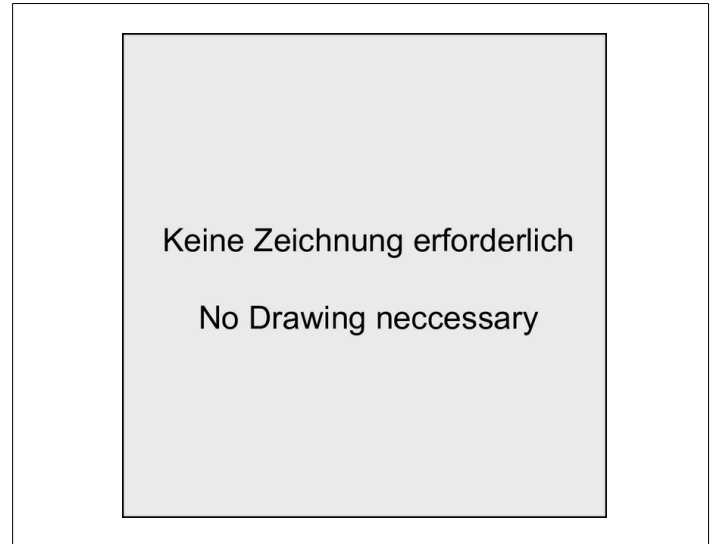

**PRODUCT ATTRIBUTES**

100% trevira, 80g/m<sup>2</sup>, vertical seams  
reinforced for stainless steel eyelets  
Distance between eyelets appr. 200 mm  
Weighted seam 50 g per meter  
impregnated, fungicide, antibacterial, antistatic,  
washable at 30°, shrinkage appr. 1-2%  
tested acc. to OEKO-Tex Standard 100  
complete with white curtain rings

**SURFACE**

anthracite/11 eyelets

**DIMENSION**

1800 x 2000 mm

**NOTE**

**SPECIFICATIONS**

KEUCO PLAN Shower curtain PLAN monochrome 14943000620  
2000 x 1800 mm, anthracite/11 eyelets  
100 % Trevira, 80 g/m<sup>2</sup>  
vertical seams, reinforced for stainless steel eyelets  
Distance between eyelets appr. 20 cm  
stainless steel rolled hem sewn on the right, per meter 50 g  
impregnated, fungicide, antibacterial, antistatic,  
calendered, washable at 30°, shrinkage appr. 1-2%  
tested acc. to OEKO-Tex Standard 100  
complete with white curtain rings

Information concerning the measurements:

All dimensions refer to actual finished size.

In order for the shower curtain not to touch bottom of bath  
tub or the floor we recommend the following: Distance  
between floor and bottom edge of curtain appr. 30 mm.  
Distance between centre of curtain pole and top edge of  
curtain appr. 40 mm.

Please allow appr. 1.3 to 1.5 times curtain pole length when  
calculating required width of curtain