


**Plan**

**14944000220 Shower curtain PLAN uni**

**PRODUCT**



**DRAWING**

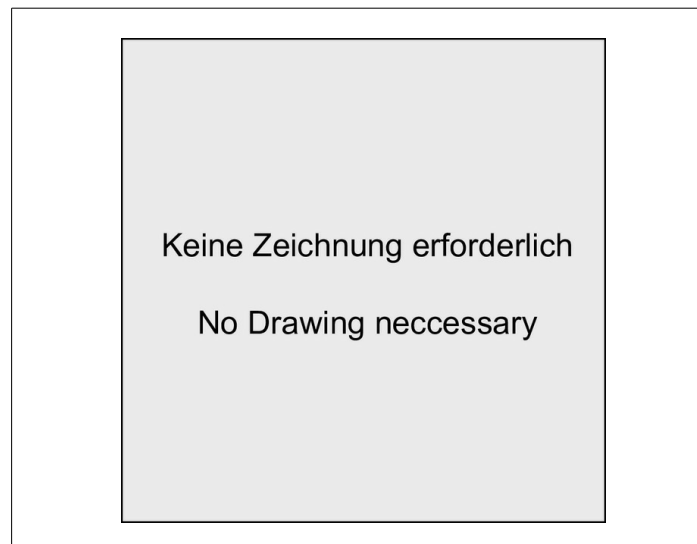

**PRODUCT ATTRIBUTES**

100% trevira, 80g/m<sup>2</sup>, vertical seams  
reinforced for stainless steel eyelets  
Distance between eyelets appr. 200 mm  
Weighted seam 50 g per meter  
impregnated, fungicide, antibacterial, antistatic,  
washable at 30°, shrinkage appr. 1-2%  
tested acc. to OEKO-Tex Standard 100  
complete with white curtain rings

**SURFACE**

light beige/11 eyelets

**DIMENSION**

2000 x 2000 mm

**SPECIFICATIONS**

KEUCO shower curtain PLAN uni, 14944000220, 2000 x 2000 mm, light  
beige, 11 eyelets  
100% trevira, 80g/m<sup>2</sup>, vertical seams  
reinforced for stainless steel eyelets,  
distance between eyelets approx. 200 mm,  
weighted seam 50 g per metre  
impregnated, fungizid, antibacterial, anitstatic,  
washable at 30°, shrinckage appr, 1-2%,  
tested acc, to OEKO-Tex Standard 100  
complete with curtain rings, white

Information concerning the measurements:  
All dimensions refer to the actual finish size,  
In order for the shower curtain not to touch the bottom of the bath  
tub or the floor we recommend the following:  
Distance between the floor and the bottom edge of the curtain appr, 30 mm,  
Dinstance between the centre of the curtain pole and the top edge of the  
curtain  
appr, 40 mm,  
Please allow appr, 1,3 to 1,5 times curtain pole length when  
calculating the required width of the curtain