


Plan

14944000320 Shower curtain PLAN uni

PRODUCT



DRAWING

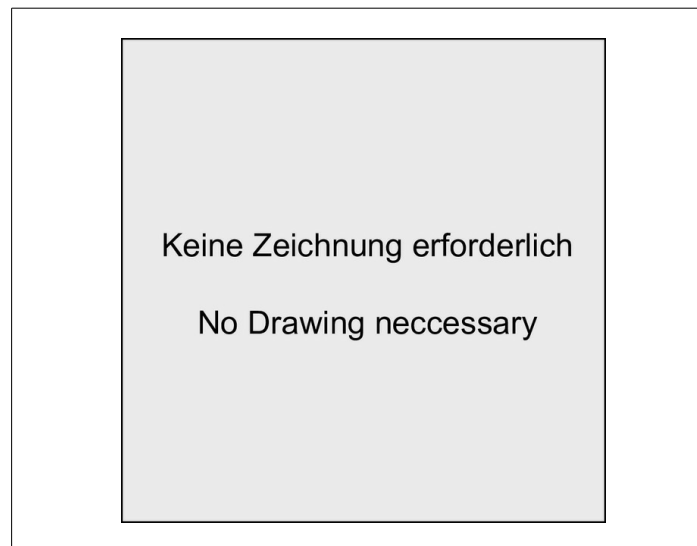

PRODUCT ATTRIBUTES

100% trevira, 80g/m², vertical seams
reinforced for stainless steel eyelets
Distance between eyelets appr. 200 mm
Weighted seam 50 g per meter
impregnated, fungicide, antibacterial, antistatic,
washable at 30°, shrinkage appr. 1-2%
tested acc. to OEKO-Tex Standard 100
complete with white curtain rings

SURFACE

light grey/11 eyelets

DIMENSION

2000 x 2000 mm

SPECIFICATIONS

KEUCO shower curtain PLAN uni, 14944000320, 2000 x 2000 mm, light
grey, 11 eyelets
100% trevira, 80g/m², vertical seams
reinforced for stainless steel eyelets,
distance between eyelets approx. 200 mm,
weighted seam 50 g per metre
impregnated, fungizid, antibacterial, anitstatic,
washable at 30°, shrinckage appr. 1-2%,
tested acc. to OEKO-Tex Standard 100
complete with curtain rings, white

Information concerning the measurements:

All dimensions refer to the actual finish size,

In order for the shower curtain not to touch the bottom of the bath
tub or the floor we recommend the following:

Distance between the floor and the bottom edge of the curtain appr. 30 mm,
Dinstance between the centre of the curtain pole and the top edge of the
curtain

appr. 40 mm,

Please allow appr. 1,3 to 1,5 times curtain pole length when
calculating the required width of the curtain