

Specchio ingranditore

17612019003 Specchio ingranditore

PRODOTTO



CARATTERISTICHE DEL PRODOTTO

con illuminazione, 1 luce 6500 Kelvin (bianco freddo), uso con interruttore, cavo sottotraccia, regolabile tridimensionalmente
specchio unilaterale, fattore d'ingrandimento x 5
Uso:
Interruttore(non compreso nella fornitura)
Alimentazione di corrente:
alimentazione elettrica con 12V trasformatore a spina
ingresso 220-240V, consumo in modalità standby: 0 Watt
Illuminazione:
LED 4,5 Watt (durata > 50.000 ore)
EEK: D , 5 kWh/1000h


SUPERFICI

cromato

DIMENSIONE

1 Lichtfarbe, ohne Kabel

DISEGNO

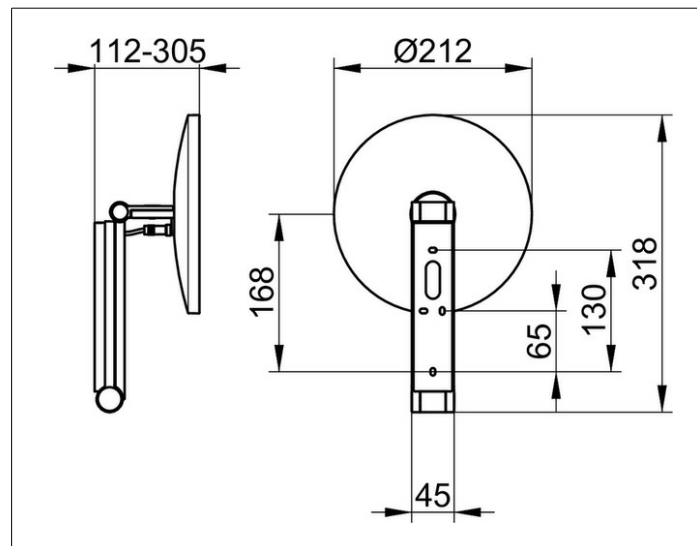

SPECIFICHE

KEUCO iLook_move cosmetic mirror, 17612019003
high quality cosmetic mirror, round, chrome-plated, illuminated, on pivoted rail, wall mounted surface with 4 fixing point for an optimal load distribution, adjustable in three dimensions, one sided mirror, magnification factor x 5, Mains connection via wall socket, 12V in-wall adapter (included), input 220-240 V and in-wall cable layout, Illumination: 1 x 4,5 Watt LED (maintenance-free), Standby consumption: 0 Watt
Operation by light switch
not included in delivery,
1 light colour: 6500 Kelvin (daylight),
Height wall fixing 180 mm, width ca. 45 mm, max. height ca. 500 mm, outside diameter 212 mm, max. depth ca. 300 mm, the cosmetic mirror is fixed concealed
delivery includes anti-corrosion fixings

Note:

In-wall power supply and low voltage connecting cable (500 mm) are included in delivery.
Due to the in-wall cable routing the position of the cosmetic mirror must be already defined in shell construction.

For the in-wall cable routing and the integration of the in-wall power supply we offer according to type of wall suitable rough sets.

Please order separately:

Rough part wall socket for cavity wall installation: Art.Nr. 17699000003

Rough part wall socket for mounting to the brickwork: Art.Nr. 17699000004