


IXMO
59557011202 Rubinetto d'arresto e deviatore a due vie sottotraccia con attacco tubo flessibile e supporto doccia c

PRODOTTO



DISEGNO

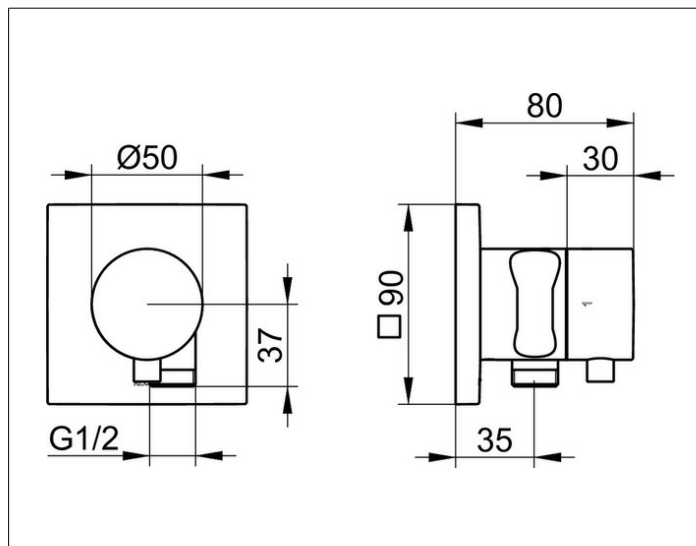

CARATTERISTICHE DEL PRODOTTO

per tubi flessibili con dado conico
 Set composto da:
 manopola, supporto, rosetta (quadrata) e rubinetto d'arresto
 e deviatore, con sistema antiriflusso,
 adatto per struttura base sottotraccia cod.art. 59556 000170

SUPERFICI

cromato

DIMENSIONE

IXMO Comfort, eckig

SPECIFICHE

KEUCO IXMO 2-way stop and diverter valve
 with wall outlet for shower hose
 and hand shower bracket DN 15, 59557011202
 chrome-plated 2-way stop and diverter valve
 with wall outlet for shower and hand shower bracket,
 IXMO Comfort lever with square rosette,
 freely positionable, with backflow preventer,
 installation depth 80 - 110 mm,
 with adjustment facilities whilst assembling
 for handle and rosette,
 with hose connection G1/2 inch
 and integrated hand shower bracket, fo
 r shower hoses with fitted conical end brackets,
 e.g KEUCO shower hose 54995...,
 rosette 90 x 90 mm, 10 mm thick,
 total depth 80 mm,
 set complete with:
 handle, sleeve, rosette (square) and stop/diverter valve,
 suitable for rough part no. 59556000170